

# Carpet Sign

## Connect

### Technical information

production method:	tufted
pile material:	38,5% wool/19,5% linen/14% silk 14% viscose en 14% cotton
pile height:	10
pile weight gr/m2:	2200
number of standard colours:	14x loop pile - 14 cut pile 13x silk stripe
Customer own colour:	no
maximum size without seams:	430 x 470 cm
Special shapes & design:	available on request
cleaning :	www.james.eu
design :	Carpet Sign studio

### Durability

- This rug can be used with under-floor heating, unless it is a wall to wall carpet.
- Connect has officially been tested and is suitable for residential and contract use.

### Fire safety

Connect is made of 100% pure wool, which is naturally flame retardant.

### Maintenance



- It is important to vacuum your rug at least once a week to prolong its durability.
- a new rug will produce fluff, but this is temporary. This fluff does not affect the quality of your rug.
- The ideal air humidity for wool is around 50%. Please note that if the air humidity is below 50%, the material becomes dry and its natural elasticity will decrease.
- In order to prevent wool from drying out, we recommend misting your woollen rug with water regularly.
- In order to prevent heavy use on one particular location, we recommend turning your rug around once in a while.
- Due to our use of natural materials, slight colour differences may occur.
- We offer personal maintenance advice via [www.james.eu](http://www.james.eu)

### Underlay

- For rugs to be placed on wooden floors or natural stone floors (e.g. marble), the use of an underlay is strongly recommended.

### Warranty

- Carpet Sign offers 5 years warranty (excluding shading)

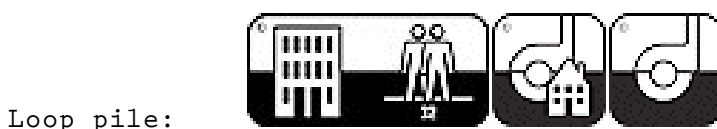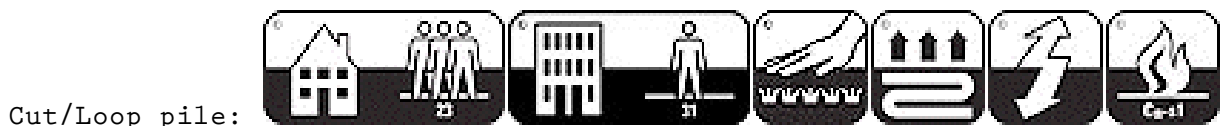

Carpet Sign bv  
Bonksel 1  
5721 TP Asten  
The Netherlands

T. +31 (0)493 696 723  
F. +31 (0)493 69 09 69  
[info@carpetsign.nl](mailto:info@carpetsign.nl)  
[www.carpetsign.nl](http://www.carpetsign.nl)